

# SOLID 166E

## Ideal for:

- Label batch printing
- 2-up document printing
- Personalization
- On-demand publications (mail shots etc)
- Utilities, banks or Government high through-put requirements

## HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Fast and economical cold fusing printer with 17-inch printing width
- Prints on paper, PVC, plastic, etc.
- USB, Ethernet (10/100 Mbit) as standard
- Laser and matrix printer compatible
- SAP with the standard PCL5e emulation
- Perfect control via Status Out
- Optional IPDS emulation making it the printer of choice for IBM solutions

**HIGH PERFORMANCE,  
IMPRESSIVE COST  
EFFECTIVENESS**



## SOLID 166E

18 inch paper width, 166 pages per minute: given its phenomenal performance the SOLID 166E is unbelievably economical to operate. As a fast continuous laser printer for high printing volumes it covers a broad spectrum of deployment areas. The powerful Microplex Controller guarantees connection versatility, functional diversity, easy process and systems integration as well as highest printing performance. Cold fusing via Xenon flash lamps also enables thermally sensitive materials such as plastic or PVC to be used. And fusing is also trouble-free even on thick materials.

## Print Engine

<b>Print technology</b>	LED, OPC xenon flash lamp
<b>Controller</b>	MPC 3.3 with Intel CPU (>2 GHz CISC Processor)
<b>Print speed</b>	6.000 lpm (6 lpi) 25,4 m/min up to 83/166 ppm (12x17"/12x8,5" 2up-mode) up to 86/172 ppm (A3 landscape/A4 2up-mode)
<b>Print resolution</b>	max. 600 dpi x 600 dpi
<b>Duty cycle</b>	up to 850.000 pages (based on a using period of 60 months), 12x17 inch max. up to 1.275.000 pages (12x17")
<b>Power supply</b>	400V, 50/60 Hz (delivery with 32 Amp. 5-pole CEE connector)
<b>Power consumption</b>	9 kVA
<b>Acoustic noise</b>	<65,1 (< 51,6 stand-by) dB (A)
<b>Dimensions (WxDxH in mm)</b>	1580 x 870 x 1350
<b>Weight</b>	550 kg (without Options)
<b>Environment temperature</b>	15 - 35°C
<b>Relative humidity</b>	30 - 80 % (rel., non-condensing)
<b>Interfaces</b>	Serial: USB 2.0 Parallel: IEEE 1284 (Centronics) LAN: Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP)
<b>Memory</b>	RAM: 512MB Flash: 64MB

## MPC 3.3 High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno,  $\mu$ -Postscript, LN03+, BULL-MP6090, Etimark MP-1220, TEC Bx72, TEC B6xx, Diablo 630, IBM Proprinter EPSON FX-80, MT-600/MT40, IDS, ANSI Genicom, TIFF, XML (SAP RFID), CUPS Raster

### Optional Emulations

CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP-10, Datamax (FGL), Datamax Labelpoint, LDC, ZPL II, EPL 2, UPI Fingerprint, IER Command, Godex EZPL, HP Designjet, IPDS, AEA, AFP, Status-Out

### Barcodes

Codebar, Code39, MSI, PDF417, Interleaved 2/5, Interleaved 2/5 (3-Strich Datalogic), EAN-8, 13, 128, Interleaved 2/5 (3-Strich Matrix), Add-On-Codes, Code11, Code93, Code 128, UPC-A, UPC-E

### Optional Barcodes

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

### Additional functions

<b>Intelligent barcode generation</b>	on-the-fly in the printer
<b>Format splitting</b>	in several subformats by command
<b>Integrated form management</b>	up to 12 MB flash for forms and fonts inside the printer

### Optional functions

#### Status-Out

gives notice of each correctly printed page via interface

#### SPS-Control (EMBEDDED INTELLIGENCE - Enabling two-way communication between printer and a PLC)

integration of the printer into production lines is possible, controlled by SPS-interface.




## Printable Media

### Size

Form length	7" - 20"
With stacker	7" - 14"
Form width	7" - 18"
Printable area	17"

### Weight

60 - 209 g/m<sup>2</sup>

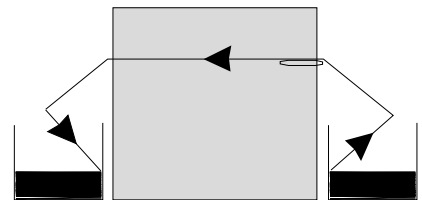

## Paper Path

### Input

push tractor

### Output

stacker

capacity: 2.000 pages

The brand names referred to are the registered trademarks of the respective companies. All figures and details in italics and highlighted in color are optional. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 27.06.2017

Microplex Printware AG

Panzerstraße 5 | 26316 Varel | Germany  
phone +49 4451 91 37-0 | fax +49 4451 91 37-49



PRINTING TECHNOLOGIES  
ENGINEERED IN GERMANY

www.microplex.de