

# logiJET TC8

**MAXIMUM  
PERFORMANCE FOR  
SMOOTH PRODUCTION  
AND LOGISTICS  
PROCESSES**



## PCL5 Compatible 8-Inch Thermal Transfer Printer

### HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- GHS-compliant hazardous materials labeling
- Two color printing to ensure greater attention
- Completely trouble-free paper handling
- SAP® and AS/400 compatible (through PCL5 + JetCAPS as well as LAN-IPDS)
- Compatible with standard laser printers

### FIELDS OF APPLICATION

- Hazardous materials labeling
- Price labeling
- Logistics
- Pharmaceuticals



## Print Engine

<b>Print technology</b>	Thermal transfer harmonic (history-controlled flat head technology)
<b>Controller</b>	MPC 8.x
<b>Print speed</b>	up to 150 mm/s up to 6 inch/s
<b>Print resolution</b>	300 dpi x 300 dpi
<b>Lifetime print head</b>	Transfer: up to 50.000 m
<b>Power supply</b>	100 - 240 VAC, 50/60 Hz
<b>Power consumption</b>	6,0 A
<b>Dimensions (W x D x H in mm)</b>	389 x 420 x 293 mm
<b>Weight</b>	21,5 kg (without options)
<b>Environment temperature</b>	5 - 40°C
<b>Relative humidity</b>	25 - 85 % (rel., non-condensing)
<b>Interfaces</b>	USB 2.0  Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP) RS232, RS422, IEEE 1284 (Centronics) WIFI: IEEE 802.11 n/g/b, WEP with 64 and 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
<b>Options*</b>	RAM: 256 MB Flash: 256 MB
<b>Memory</b>	Color-Touch-Panel 3.7 inch (480 x 242 pixel)

## MPC 8.x High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, IGP/PGL, AGFA Reno, LN03+, BULL-MP6090, Datamax, Etimark MP-1220, TEC Bx72, TEC B6xx, LDC, ZPL II, EPL2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, Diablo 630, IBM Proprinter, Epson FX-80 (ESC/P), MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP® RFID), CUPS Raster,

### Optional Emulations

µ-Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, Labelpoint, IPDS, AEA, PDF Direct Printing\*\* (more emulations on request)

### Barcodes

Codebar, Code39, MSI, PDF 417, Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5, Interleaved 2/5, Interleaved 2/5 (3-Stroke Datalogic), Interleaved 2/5 (3-Stroke Matrix), EAN-8, 13, 128, Add-On-Codes, Code11, Code93, Code 128, UPC-A, UPC-E, (more barcodes on request)

### Additional functions

<b>Network capabilities</b>	authentication standard IEEE 802.1X
<b>Intelligent barcode generation</b>	on-the-fly in the printer
<b>Format splitting</b>	in several subformats by command

### Optional functions

#### Integrated form management (RFM)

Forms and fonts can be stored in the flash memory and can be accessed when needed.

#### Status-Out

gives notice of each correctly printed page via interface. Further features can be found in the manual.

#### Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.

Integration of the printer into production lines is possible, controlled by GPIO-interface

Customer / Application specific modifications possible.

\* Not all interface options can be activated at the same time.  
\*\* Only available from MPC 3.4, MPC 3.6, MPC 7.x and MPC 8.x

The brand names referred to are the registered trademarks of the respective companies. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 16.02.2023

EMEA  
APAC

**MICROPLEX PRINTWARE AG**  
Panzerstraße 5, 26316 Varel  
Germany  
Phone: +49 4451 91370  
E-Mail: sales@microplex.de


AMER  
Canada

**MICROPLEX PRINTWARE CORPORATION**  
30300 Solon Industrial Pkwy Suite E, Solon, OH 44139  
USA  
Phone: +1 440-374-2424  
E-Mail: info@microplex-usa.com



## Printable Media

<b>Size</b>	100 - 222 mm width printable width max. 219 mm
<b>Paper thickness</b>	0,14 mm - 0,25 mm
<b>Thermal transfer ribbon</b>	roll diameter max. 78 mm
<b>Core diameter</b>	1 inch / 25,4 mm
<b>Ribbon length</b>	max. 450 m
<b>Coated side</b>	outside
<b>Ribbon width</b>	max. 220 mm

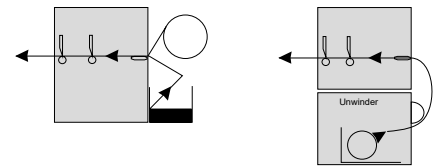

## Paper Path

### Input

continuous  
external from roll  
external, e.g. fanfold  
sensor for black mark and label gap (reflection and transmissive)

### Optional

unwinder  
Size: 100 - 220 mm width  
Label roll diameter max. 203 mm  
Core diameter 3 inch / 76,2 mm

### Output

Job tear-off



PRINTING TECHNOLOGIES  
ENGINEERED IN GERMANY

www.microplex.de