

SOLID 105A3-2

**HIGHEST
PERFORMANCE
FOR BUSINESS,
LOGISTICS
AND PRODUCTION**

A3 Laser Printer for Just-in-Time Applications

HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Minimal downtime and extremely long maintenance intervals
- Toner refill possible during operation
- Extremely fast printing speed
- Flexible expansion options for paper feed and tray
- Duplex printing at full printing speed
- Optional IPDS emulation making it the printer of choice for IBM® solutions

FIELD OF APPLICATION

- Just-in-time applications
- On-demand printing
- Business and workflow documents



Print Engine

Print technology	Laser, OPC heat / pressure
Controller	MPC 3.6
Print speed	up to 105pages/minute (A4) up to 52 pages/minute (A3)
Print resolution	max. 600 dpi x 600 dpi
Duty cycle	up to 400.000 pages (A4 landscape) (based on a using period of 60 months) max. 500.000 pages (A4 landscape)
Power supply	220-240 VAC, 50 Hz
Power consumption	13A
Dimensions (WxDxH in mm)	870 x 760 x 980 (printer only) 1080 x 810 x 1190 mm (incl. Display)
Weight	ca. 300 kg (without options)
Environment temperature	10 - 30°C
Relative humidity	20 - 85 % (rel., non condensing)
Interfaces	USB IEEE 1284 (Centronics) Ethernet-Interface 10/100/1000 MBit, bi-directional (TCP/IP)
Memory	RAM: 2GB Flash: 50MB

MPC 3.6 High-End Print-Controller

Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno, µ-Postscript, LN03+, BULL-MP6090, Etimark MP-1220, TEC Bx72, TEC B6xx, Diablo 630, IBM Proprinter, EPSON FX-80 (ESC/P), MT-600/MT40, IDS, ANSI Genicom, TIFF, XML (SAP® RFID), CUPS Raster

Optional Emulations

CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP/PGL, Datamax, Labelpoint, LDC, ZPLII, EPL 2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, HP Designjet, IPDS, AEA, PDF Direct Printing* (more emulations on request)

Barcodes

Codabar, Code39, MSI, PDF417, Interleaved 2/5, Interleaved 2/5 (3-Stroke Datalogic), Interleaved 2/5 (3-Stroke Matrix), EAN-8, 13, 128, Add-On-Codes, Code11, Code93, Code 128, UPC-A, UPC-E

Optional Barcodes (Barcode 2)

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

Additional functions

Intelligent barcode generation	on-the-fly in the printer
Format splitting	in several subformats by command
Integrated form management (RFM)	Forms and fonts can be stored in the flash memory and can be accessed when needed

Optional functions

Status-out

gives notice of each correctly printed page via interface. Further features can be found in the manual.

Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.


Integration of the printer into production lines is possible, controlled by GPIO-interface

Customer / Application specific modifications possible.



Printable Media

Size	A5R* - A3W*
Weight	60 to 220 g/m ² max. 300 g/m ² (option 3430 is required)

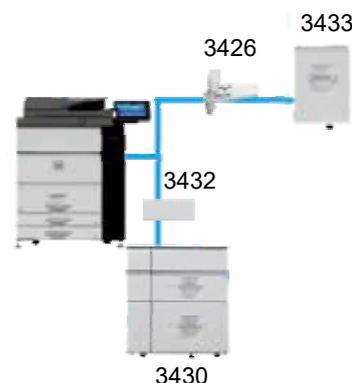

Paper Path

Input

1+2: 1.200 and 800 sheets (A4/Letter)
cassette 3: 500 sheets (B5R* bis A3W**)
cassette 4: 500 sheets (A5R* to A3W**)

Optional

up to 3.500 sheets A4, B5 (3433)
up to 5.000 sheets (3430)
(each 2.500 sheets in tray 5 and 6)
A3W** - A5R* (no offset)

Output

faceup / face down

Optional

finisher saddle stitching (Art. 3440)
4000 sheets, 100-sheets-stitching
A3 - B5R* (offset/stitching), A3W** - A5R
(no offset) (more options on request)

* R = short side feeding

**A3W = 12" x 18" [304mm x 457mm]

* Only available from MPC 3.4, MPC 3.6, MPC 7.x and MPC 8.x

The brand names referred to are the registered trademarks of the respective companies. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 31.07.2023

EMEA
APAC

MICROPLEX PRINTWARE AG
Panzerstraße 5, 26316 Varel
Germany
Phone: +49 4451 91370
E-Mail: sales@microplex.de

AMER
Canada

MICROPLEX PRINTWARE CORPORATION
30300 Solon Industrial Pkwy Suite E, Solon, OH 44139
USA
Phone: +1 440-374-2424
E-Mail: info@microplex-usa.com

