



# SOLID T6

**MAXIMUM FLEXIBILITY  
FOR SMOOTH  
PRODUCTION AND  
LOGISTICS PROCESSES**

## 6-Inch Thermal Printer for Toughest Continuous Operation

### HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Easy handling of consumables
- USB, Ethernet (10/100 Mbit) as standard
- Laser printer compatible
- SAP® and AS/400 compatible (through PCL5 + JetCAPS as well as LAN-IPDS)
- Very high printing speed
- Robust metal case
- Ribbon Safe Modus
- Enabled for remote printer management software SOTI Connect

### FIELDS OF APPLICATION

- Stickers, labels and tags
- Roughest production and logistics operations
- Fast just-in-time printing or batch processing
- Toughest continuous use



## Print Engine

<b>Print technology</b>	Thermal transfer/direct thermal harmonic (history-controlled near-edge print head)
<b>Controller</b>	MPC 8.x
<b>Print speed</b>	up to 406 mm/s up to 16 inch/s
<b>Print resolution</b>	300 dpi x 300 dpi
<b>Lifetime print head</b>	Transfer: up to 50.000 m Direct: up to 25.000 m
<b>Power supply</b>	115 - 240 VAC, 50/60 Hz
<b>Power consumption</b>	3,2 A
<b>Dimensions (WxDxH in mm)</b>	350 x 490 x 305
<b>Weight</b>	21,5 kg (without Options)
<b>Environment temperature</b>	5 - 35°C
<b>Relative humidity</b>	45 - 75 % (rel., non-condensing)
<b>Interfaces</b>	USB, IEEE 1284 (Centronics), Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP)
<b>Optional*</b>	RS232, RS422 WiFi: IEEE 802.11 n/g/b, WEP with 64 and 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
<b>Memory</b>	RAM: 256 MB Flash: 256 MB

## MPC 8.x High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, IGP/PGL, AGFA Reno, LN03+, BULL-MP6090, Datamax, Etimark MP-1220, TEC Bx72, TEC B6xx, LDC, ZPL II, EPL2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, Diablo 630, IBM Proprinter, Epson FX-80, MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP® RFID), CUPS Raster, PDF Direct Printing\*\*

### Optional Emulations

µ-Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, Labelpoint, IPDS, AEA, (more emulations on request)

### Barcodes

EAN 8, 13, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, PDF 417, Royalbar, Planet, Jetcaps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code

### Optional Barcodes (Barcode 2)

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

### Additional functions

<b>Network capabilities</b>	authentication standard IEEE 802.1X
<b>Intelligent barcode generation</b>	on-the-fly in the printer
<b>Format splitting</b>	in several subformats by command
<b>Ribbon Save Mode</b>	active from 12 mm unprinted length, to save ribbon
<b>Remote Management Support</b>	SOTI Connect (License necessary)

### Optional functions

#### Integrated form management (RFM)

Forms and fonts can be stored in the flash memory and can be accessed when needed.

#### Status-Out

gives notice of each correctly printed page via interface. Further features can be found in the manual.

#### Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.


Integration of the printer into production lines is possible, controlled by GPIO-interface

Customer / Application specific modifications possible.



## Printable Media

<b>Size</b>	30,2 - 185 mm width printable width 160 mm
roll diameter	max. 210 mm (max 7200 g)
Core diameter	1,5 / 3 / 4 inch (38,1 - 102 mm)
<b>Weight</b>	max. 240 g/m <sup>2</sup>
<b>Paper thickness</b>	0.2 - 0.9 mm
<b>Thermal transfer ribbon</b>	roll diameter max. 90 mm
<b>Core diameter</b>	1 inch (25.4 mm)
<b>Ribbon length</b>	max. 600 m
<b>Coated side</b>	inside (outside possible)
<b>Ribbon width</b>	30 - 164 mm

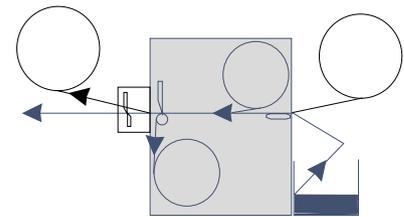

## Paper Path

### Input

Continuous  
internal from roll, external, e.g. fanfold  
standard: Gap sensor (transmissive)  
optional: Black Mark sensor (reflection)

### Output

Single / Job tear-off

### Optional

Continuous external rewinder  
Single peel-off, Cutter  
Job cutter

\* Not all interface options can be activated at the same time.  
\*\* Only available with MPC 3.6, MPC 7.x and MPC 8.x

The brand names referred to are the registered trademarks of the respective companies. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 05.01.2026

EMEA  
APAC

**MICROPLEX PRINTWARE AG**  
Panzerstraße 5, 26316 Varel  
Germany  
Phone: +49 4451 91370  
E-Mail: sales@microplex.de

AMER  
Canada

**MICROPLEX PRINTWARE CORPORATION**  
30300 Solon Industrial Pkwy Suite E, Solon, OH 44139  
USA  
Phone: +1 440-374-2424  
E-Mail: info@microplex-usa.com

